





AIR STAPLER




GP-71/16K




GP-80/16K




GP-80/25K




GP-90/25K




GP-90/40K




**• 2 in 1 Stapler & Nailer
GP-50/40K**



GP-422K



GP-1022K



AIR STAPLER

Specifications

Recommended Air Pressure 60 ~ 100 psi

Model	Gauge	Crown (mm)	Staple Size W.x T.x L. (mm)	Tool Size L.x H.x W. (mm)	Load Capacity (pcs)	Net Weight (kgs)	Sound Pressure (dBA)	Vibration (m/sec ²)	Packing
GP-71/16K	22	9.1	0.75 x 0.60 x (6-16)	200 x 147 x 42	100	0.96	77.4	1.10	10 pcs/0.9 cu-ft/G.W.: 11 kgs
GP-80/16K	21	12.8	0.95 x 0.65 x (6-16)	200 x 147 x 42	100	0.96	77.4	1.10	10 pcs/0.9 cu-ft/G.W.: 11 kgs
GP-80/25K	21	12.8	0.65 x 0.95 x (10-25)	240 x 177 x 51	100	1.10	79.8	2.12	10 pcs/1.2 cu-ft/G.W.: 13 kgs
GP-90/25K	18	5.8	1.00 x 1.25 x (10-25)	240 x 177 x 51	100	1.10	78.9	2.12	10 pcs/1.2 cu-ft/G.W.: 13 kgs
GP-90/40K	18	5.8	1.00 x 1.25 x (10-40)	310 x 270 x 77	100	2.18	82.8	3.06	5 pcs/1.5 cu-ft/G.W.: 16 kgs
GP-50/40K	18	5.8	Stapler : 1.00 x 1.25 x (10-40) Nailer : 1.00 x 1.25 x (15-50)	237 x 237 x 50	100	1.70	78.8	2.86	10 pcs/1.4 cu-ft/G.W.: 18 kgs
GP-422K	20	4.1	0.55 x 0.95 x (10-22)	240 x 177 x 51	100	1.10	81.4	2.58	10 pcs/1.2 cu-ft/G.W.: 13 kgs
GP-1022K	20	10.1	0.55 x 0.95 x (13-22)	240 x 177 x 51	100	1.10	81.4	2.58	10 pcs/1.2 cu-ft/G.W.: 13 kgs




AIR NAILER



GP-16/50K




GP-16/64K




GP-F18/30K



GP-F18/50K



GP-90/21K



AIR NAILER


Specifications

Recommended Air Pressure 100 psi

Model	Gauge	Nail Size W.x T.x L. (mm)	Tool Size L.x H.x W. (mm)	Load Capacity (pcs)	Net Weight (kgs)	Sound Pressure (dBA)	Vibration (m/sec ²)	Packing
GP-16/50K	16	1.60 x 1.40 x (20-50)	310 x 270 x 77	100	2.18	81.1	3.00	5 pcs/1.5 cu-ft/G.W.: 16 kgs
GP-16/64K	16	1.60 x 1.40 x (25-64)	295 x 303 x 92	100	2.48	83.0	3.06	5 pcs/2.7 cu-ft/G.W.: 18 kgs
GP-F18/30K	18	1.20 x 1.00 x (10-30)	235 x 197 x 55	100	1.20	76.7	1.94	10 pcs/1.2 cu-ft/G.W.: 13 kgs
GP-F18/50K	18	1.20 x 1.00 x (15-50)	205 x 240 x 55	100	1.40	79.0	2.40	10 pcs/1.5 cu-ft/G.W.: 16 kgs
GP-90/21K	Shank Type : Smooth, Screw, Ring Shank Dia.: 2.87, 3.05, 3.33 mm Round Head, Collated : Plastic		478 x 350 x 127	105	3.80	92.4	4.40	1 pc/1 cu-ft/G.W.: 4.5 kgs



AIR C HOG RING PLIER

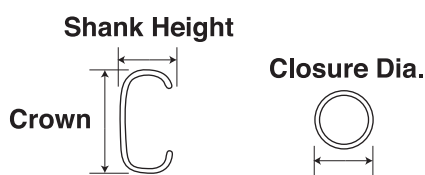

AIR C HOG RING PLIER

Specifications

Recommended Air Pressure 90 ~ 105 psi

Model	Gauge	Wire Dia. (mm)	Crown (mm)	Shank Height (mm)	Clousure Dia. (mm)	Load Capacity (pcs)	Net Weight (kgs)	Tool Size (mm) L x H x W	Packing
GP-AC02-16	16	1.6	16.9	12	1.6	100	1.56	285 x 200 x 100	5 pcs/1.77 cu-ft/G.W.: 11 kgs
GP-AC02-25	16	1.6	16.9	12	2.5	100	1.56	285 x 200 x 100	5 pcs/1.77 cu-ft/G.W.: 11 kgs
GP-AC02-30	16	1.6	16.9	12	3.0	100	1.56	285 x 200 x 100	5 pcs/1.77 cu-ft/G.W.: 11 kgs
GP-AC02-45	16	1.6	16.9	12	4.5	100	1.56	285 x 200 x 100	5 pcs/1.77 cu-ft/G.W.: 11 kgs
GP-AC01-48	15	1.8	23.7	12	4.8	100	1.45	315 x 182 x 90	6 pcs/2 cu-ft/G.W.: 12 kgs
GP-AC01-55	15	1.8	23.7	12	5.5	100	1.45	315 x 182 x 90	6 pcs/2 cu-ft/G.W.: 12 kgs
GP-AC01-65	15	1.8	23.7	12	6.5	100	1.45	315 x 182 x 90	6 pcs/2 cu-ft/G.W.: 12 kgs
GP-AC01-80	15	1.8	23.7	12	8.0	100	1.45	315 x 182 x 90	6 pcs/2 cu-ft/G.W.: 12 kgs
GP-AC03-80	15	1.8	23.7	12	8.0 ~ 11.0	100	1.50	332 x 182 x 90	6 pcs/2 cu-ft/G.W.: 13 kgs